


Hardtop Roof Instructions

Read all directions BEFORE assembling and installing hardtop.

- 1) Assemble hardtop frame as shown, assemble on floor first.

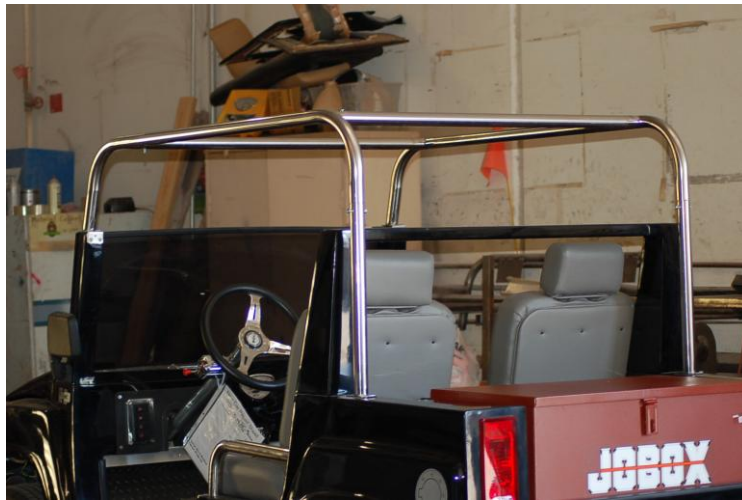

- 2) Insert 2x $\frac{1}{4}$ " (shown) bolts in the 4 corner holes and 2 frame leg holes.





- 3) Lift frame onto car as shown (2 people needed).
- 4) Make sure mounting bracket is flat on cartbody. Drill into cartbody using $\frac{1}{8}$ " drill bit. And 8x1 Phillips Pan screws and plastic washers (shown).



Drill 1 screw into each bracket, doing one side first, then the other. It is normal if the other side does not stay flat on the cart body. It is helpful to tape brackets to the cartbody to

keep them in place. Hold down mounting brackets onto the cartbody on other side before drilling the screws in, this will provide necessary tension.




- 5) Take out the 4 CORNER bolts from Step #2. NOT LEG bolts.
- 6) Set hardtop on frame and align properly. Make sure both sides are spaced equally.
 - about 13" front back lip to drill hole
 - about 5" from side lip to drill hole



Use curtain to make sure hardtop is aligned adequately on both sides. Line curtain along the ridge of the roof lip.

- 7) Drill $\frac{1}{4}$ " drill bit from hole in roof frame thru the hard top. Use $\frac{1}{4}$ " washer. Insert screw from TOP of roof. Do this for all 4 screws. Put chrome caps on screws.

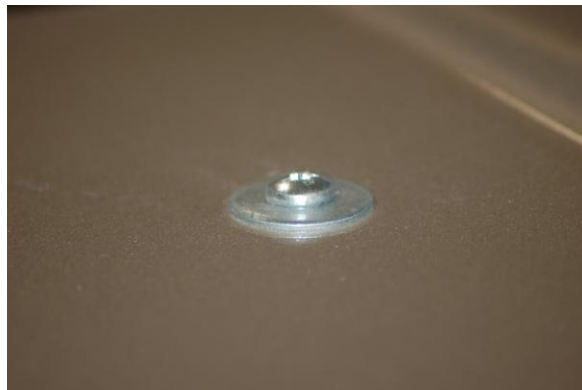

- 8) Line the curtain to mark where to put snaps. Remember to pull

curtain tight to add tension. Use $\frac{1}{8}$ " drill bit for snaps. Install corner snaps of curtain first.



Zip rear cover to snapped-on side cover. Then apply snaps in same manner.



Put on other door section in same manner. Zip to rear section. Pull to add tension, then apply corner snaps first.

- 9) Install extended windshield. Apply velcro on windshield, then drill holes for snaps adding tension.



- 10) Drill holes for other snaps after corner snaps and velcro have been applied.